






SPECIFICATIONS

Size	Metric	British
Max. Working Height	20.23m	66ft 4in
Max. Platform Height	18.23m	60ft
Max. Operating Range(+0.6m)	13.36m	44ft
Max. Platform Range	12.76m	41ft 10in
Flatbed Transport Dimensions (L×W×H)	7.63m×2.44mx2.68m	25ft×8ft×8ft 9in
Standard Container Transport	All Applicable	All Applicable
Platform Size(Length×Width)	1.83m×0.79m	6ft×2ft 7in
Turntable Tailswing	1.24m	4ft 1in
Ground Clearance A	0.31m	1ft
Wheelbase B	2.40m	7ft 10in
Turning Radius(Inside/Outside)	3m/4.73m	9ft 10in/15ft 6in
Tyres	315/55D20	315/55D20

320kg	705lb
2	2
40%	40%
6.0km/h	3.7mph
1.1km/h	0.7mph
X-5°/Y-5°	X-5°/Y-5°
360°Continuous	360°Continuous
180°	180°
132°	132°
	2 40% 6.0km/h 1.1km/h X-5°/Y-5° 360°Continuous 180°

Weight		
Overall Weight(Lead-acid Battery)	8750kg	19290lb
Overall Weight(Lithium Battery)	8150kg	17968lb

Power		
Lead-acid Battery	48V/450Ah	48V/450Ah
Lithium Battery	48V/420Ah	48V/420Ah
Charger	48VDC/60A	48VDC/60A
Driving Motor	34VAC/9kW	34VAC/9kW
Lifting Motor	34VAC/13kW	34VAC/13kW
Hydraulic Tank	145L	38gal

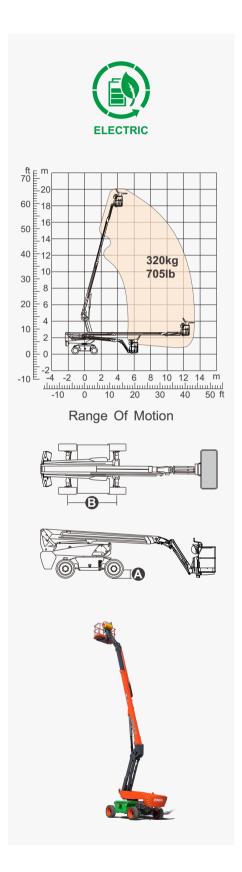



Modular Boom Series

FEATURES

Standard Items

- 1.50m (4ft 11in) Jib
- Front Oscillating Axle
- Two-Wheel Steering
- Four-Wheel Drive
- · Self-Leveling Platform
- 180° Left And Right Swing Platform
- Proportional Joystick Controls
- Thumb Rocker Steer
- Drive Enable
- Ac Power Cord To Platform
- Tilt Alarm
- Descent Alarm
- Flash
- Horn
- · Hour Meter
- Integral Integrated Special Drive Axle

For Construction Machinery

- 360° Continuous Turntable Rotation
- Positive Traction Four Wheel Drive
- Platform Load Sense System
- Fault Diagnosis System
- Operator Anti-crushing Protection System
- · Harsh Environment Kits
- 12V DC Auxiliary Power
- Battery 450Ah/48V
- Driving Motor 9kW 4834rpm
- · Lifting Motor 13kW 1855rpm











Telesconic Boom-BT

Working Height-20m

Jib

Flectric-F

Rough Terrain-RT



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deging, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











