


## **SPECIFICATIONS**

Size	Metric	British
Max. Working Height <b>A</b>	12.50m	41ft
Max. Platform Height <b>B</b>	10.50m	34ft 5in
Overall Length(Stowed) <b>(6</b>	1.69m	5ft 7in
Overall Width(Stowed)	0.82m	2ft 8in
Overall Height(Stowed)	1.99m	6ft 6in
Outrigger Footprint(Length > Width )	2.31m/2.39m	7ft 7in/7ft 10in
Platform Size(Length ( × Width ( )	1.40m×0.65m	4ft 7in×2ft 2in
Ground Clearance	0.055m	2in
BackSize	Ф180×50mm	Ф180×50mm
FrontSize	Ф180×50mm	Ф180×50mm

Performance		
S.W.L	250kg	551lb
Max. Occupants(Indoor/Outdoor)	2/0	2/0
Up/Down Speed	62/42sec	62/42sec

Weight		
Weight - AC	820kg	1807lb
Weight - DC	880kg	1940lb

12V/170Ah	12V/170Ah
12VDC/30A	12VDC/30A
220VAC/1.5kW	220VAC/1.5kW
12VDC/2.5kW	12VDC/2.5kW
	12VDC/30A 220VAC/1.5kW

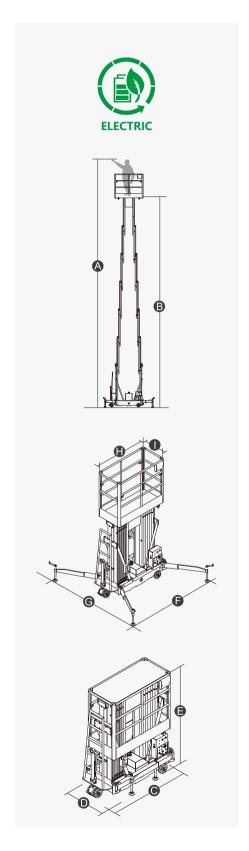





## **FEATURES**

## Standard Items

- Self-Locking Gates
- Emergency Descent System
- Tubing Explosion-Proof System
- Motion Alarm
- Charging Indicator(DC type)
- Charging Protection System(DC type)
- Flashing Beacon
- · Lanyard Attachment Point
- Tie-Down And Lifting Points
- Emergency Stop Button



## ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











